


6000 / 6300 SERIES
AIR SPA AND WHIRLPOOL TUBS
FULL SIZE AND SPACE SAVER MODELS


FINISH			N/A			APOLLO FINISH		
						SPEC NUMBER N/A		
MATERIALS								
ITEM	QTY	P/N	DESCRIPTION				MATERIAL	NOTES
.	.	.					.	

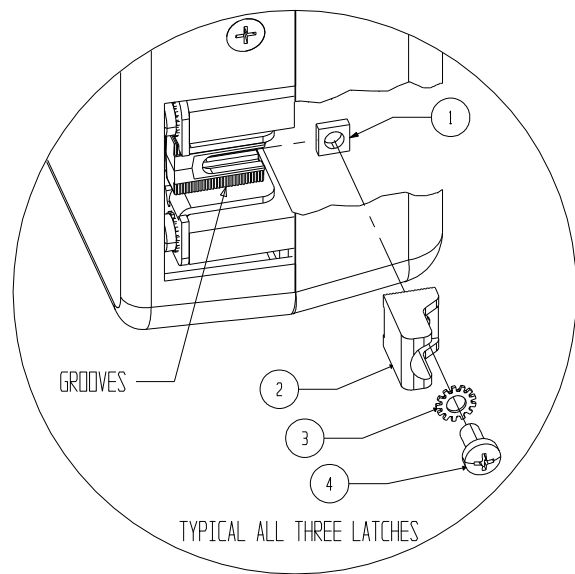


INSTRUCTIONS TO REPLACE LATCH PAWL

WITH THE DOOR OPEN

- 1 - RECORD THE LOCATION POSITION OF THE PAWLS IN THE LATCHES.
- 2 - USING A #2 PHILLIPS SCREWDRIVER, REMOVE THE SCREW HOLDING THE PAWL IN PLACE.
- 3 - REMOVE PAWL.
- 4 - USING A NEEDLE NOSE PLIERS, REMOVE THE HEX NUT FROM INSIDE THE LATCH.
- 5 - USING A NEEDLE NOSE PLIERS, INSTALL THE NEW HEX NUT BY SLIDING IT INTO THE SLOT ON THE LATCH.
- 6 - WHILE HOLDING THE PAWL IN ONE HAND USE THE SCREW DRIVER TO HOLD THE SCREW IN THE PAWL AND THREAD THE SCREW INTO THE HEX NUT PART WAY.
- 7 - ADJUST THE LATCH PAWLS BY MOVING THE PAWL INTO THE CORRECT GROVE ON THE LATCH AS RECORDED IN STEP 1 ABOVE.
- 8 - USING A #2 PHILLIPS SCREWDRIVER, TIGHTEN THE SCREW TO SEAT THE PAWL. **DO NOT OVER TIGHTEN!**
- 9 - REPEAT STEPS 1 THRU 8 FOR OTHER TWO LATCHES.
- 10 - CHECK DOOR FOR SMOOTH OPERATION. IF DOOR DOES NOT FUNCTION PROPERLY, REPEAT STEPS 6 AND 7 ABOVE.

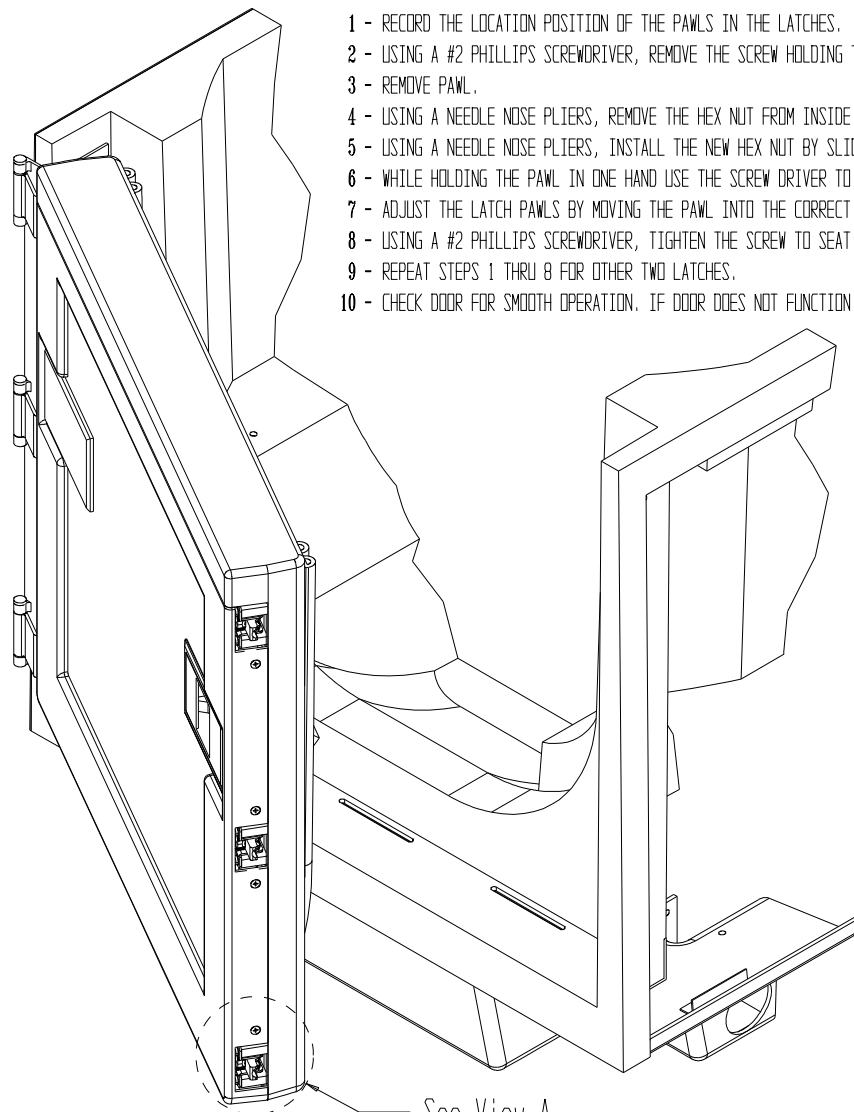

See View A

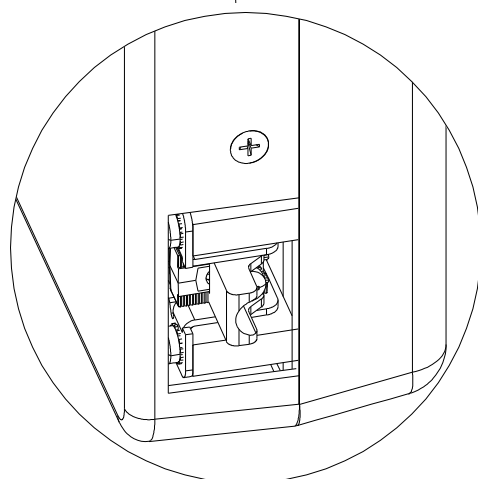

View A
1:1

A	RELEASED TO PRODUCTION		10541	JJENSEN 18 JUL 07	JA 24 JUL 07
	REV	REVISIONS	ED NUMBER	DRAWN DATE	APPROVED DATE
APOLLO CORPORATION PO BOX 219 450 MAIN ST SOMERSET WI (715)247-5625			TOLERANCE UNLESS SPECIFIED		
			.X +/- .060 DEGREES +/- 1° .XX +/- .030 .XXX +/- .015		
- NOTICE - THIS DRAWING IS PROPERTY OF APOLLO CORP WHO RESERVES ALL RIGHTS AND IS SUBMITTED UNDER A CONFIDENTIAL RELATIONSHIP. RECIPIENT AGREES NOT TO DISCLOSE ANY INFORMATION REGARDING IT TO ANY UNAUTHORIZED PERSON			1-PARTS TO BE FREE OF BURRS AND SHARP EDGES 2-ALL WELDS MUST BE CONTINUOUS SMOOTH AND FREE OF VOIDS 3-CORNER BENDS MUST BE FREE OF FRACTURES		
DWG C	63/6000 DOOR LATCH REPLACEMENT PAWL KIT INSTRUCTIONS				SHEET 1 OF 1

DWG NO
990071-A